


# Updating the firmware of the 1T-CL-322-EU and 1T-CL-322-US


You update the control panel by connecting it to your computer with the mini USB adapter.

1. Download the latest firmware from [www.tvone.com/firmware-updates](http://www.tvone.com/firmware-updates).  
Search for 1T-CL-322.
2. Choose the correct file or zipped file for your model. If the file is zipped, extract it. Copy the .BIN file to your computer.
3. Remove the front plate of the Control Panel.

On the EU model, use a small screwdriver in the two slots at the bottom of the plate to lever off the front cover. On the US model, remove the four screws.

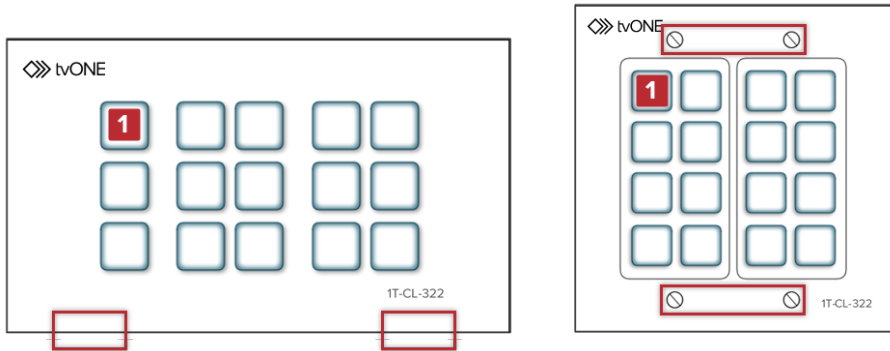

4. Disconnect the power.
5. Press and hold button 1 and reconnect the power. When button 1 flashes twice, release button 1.
6. Connect a USB cable from your computer to the mini USB socket.

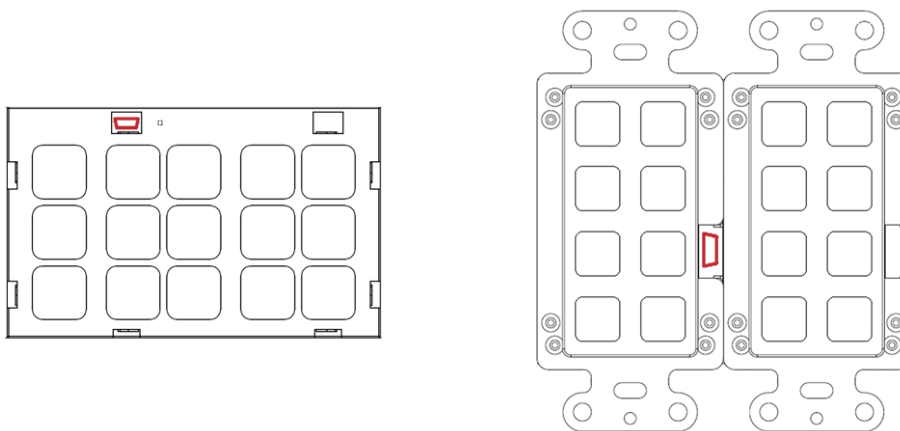

The USB UPDATE drive appears.

7. Copy the .BIN file to the root of the USB UPDATE drive. The firmware update starts automatically.

When the transfer is complete, all LEDs on the Control Panel light up. The update is complete when the Control Panel reboots automatically.

You might need to refresh the web interface as part of the firmware upgrade process. Press F5 to refresh your browser, or reconnect with the 1T-CL-SW software.

Information in this document is subject to change without notice. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of tvONE.

Copyright © 2016 tvONE. All rights reserved.